


TRENCH DETAIL

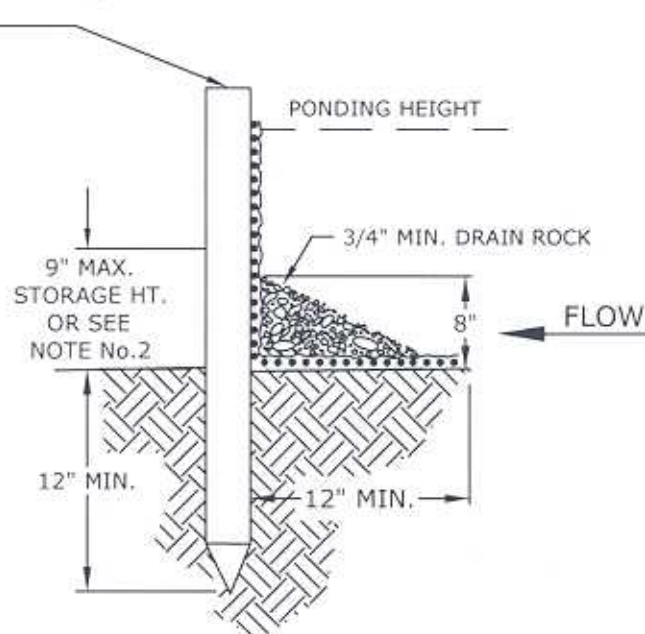

INSTALLATION W/O TRENCHING

### Notes:

1. Silt fence shall be placed on slope contours perpendicular to direction of flow to maximize ponding efficiency.
2. Inspect and repair fence after each storm event and remove sediment when necessary. 9" maximum recommended storage height.
3. Removed sediment shall be deposited to an area that will not contribute sediment off-site and can be permanently stabilized.

NOT TO SCALE

CITY OF MILPITAS, ENGINEERING DIVISION

STANDARD DRAWING

NO. 472

REVISION

DATE

DESIGNED: MK

DRAWN: JH

CHECKED: JH

APPROVED BY:

SILT FENCE

ORIGINAL: 8/24/05  
DATE

SHEET 1 OF 1

CITY ENGINEER

DATE: 8/24/05